

TL-4200

Desktop Digital Conference System



GONSIN[®]
Delivering Trust & Value



◆ TL-4200 Desktop Digital Conference System

GONSIN TL-4200 digital conference system offers versatile conferencing solutions featuring microphone discussion, interactive voting, video tracking, digital recording and software control.

TL-4200 basic discussion unit allows the delegate to speak, request to speak and listen to speech, other units with extended function can support register attendance and cast a vote . Each unit comes with headphone jack and volume control for delegates to listen to the floor speaker and any interpreted language channel, and adjust volume level for comfortable listening. Built-in speaker automatically mutes when microphone is turned on. 1 to 4 delegate microphones can be activated at the same time. The system also comes with voice-activated function, in this mode, the microphone will be activated as the users speak. The sensitivity of voice-activated is adjustable, which makes it more user friendly for normal users and the visually impaired people.



◆ Main Features

- ◆ Elegant streamline design
- ◆ Exquisite manufacturing process
- ◆ Voice-activated function
- ◆ Support multiple chairman units and vice chairman units
- ◆ Built-in loudspeaker
- ◆ Support auto camera tracking function (SD and HD)
- ◆ Highly resistant to mobile phone interference
- ◆ Electret cardioid pickup pattern microphone, rich timbre
- ◆ White-on-blue backlit LCD to display the unit status
- ◆ Pluggable gooseneck microphone stem, red ring luminant to indicate active mic

◆ Basic Functions



TL-VD4200

TL-VX4200

- ◆ In compliance with IEC60914 international standard
- ◆ With LED indicator, show microphone turn on/turn off status
- ◆ Adopt physical knobs, sensitive with good touch, accurate operation response, long service life and without mechanical button sound
- ◆ Each unit adopts the T-shaped hand-in-hand connection, easy wiring, make convenient construction
- ◆ Automatic restoration function: supports hot plug
- ◆ Standard cardioid directional electret microphone with indicator ring, a variety of lengths of dual-hose gooseneck microphone optional (standard 410mm, optional 310mm / 510mm)
- ◆ Pluggable gooseneck microphone stem, convenient for equipment maintenance
- ◆ Highly resistant to mobile phone interference
- ◆ Built-in high-speed DSP digital audio processor, can filter out the sound of invalid low-frequency components, to avoid low-frequency impact sound, and enhance the clarity of the sound
- ◆ LCD dynamic display of registration and discussion progress (such as "please register", "registered", "request to speak", "turn on microphone", etc.)
- ◆ Unique ID number, the conference system supports automatically or manually assigns ID to the corresponding equipment.
- ◆ With Ø 3.5 mm headphone jack and adjustable volume
- ◆ The built-in Ø 3.5 mm recording jack can be connected to an external recorder, meeting the recording scenario

- ◆ Built-in speaker (2W), volume adjustable, reasonable sound cavity design for clear sound
- ◆ Attendance registration function: key to register, plug-in card to register(according number),plug-in card to register(non-according number),supplementary register or revocatory register.
- ◆ Optional HD video camera tracking matrix ,switcher or HD camera, can realize HD automatic camera tracking, supporting preset overall view
- ◆ 4×1+1 video matrix is built in the Central Control Unit, and standard definition video conference camera is selected, which can realize automatic camera tracking function of standard definition and support preset overall view
- ◆ Discussion function: Operator, Auto, FIFO, VOX, request to speak(with software).
- ◆ 1-4 delegate unit can be used simultaneously (except chairman unit);chairman/vice chairman unit are not subject to active mic limit, it's allowed to open at any time.
- ◆ The system can have multiple chairman units; delegate unit can be set as vice-chairman units. Numbers of chairman and vice-chairman units are unlimited.

The chairman unit has exclusive functions below:

- ◆ Chairman units can be activated at any time without presetting mic limit
- ◆ Chairman unit has priority key to override all active delegate units

◆ **Based on functions of TL-4200, TL-VB4200 unit has functions below:**



- ◆ Voting: Yes/No/Abstain. First key-press or final key-press voting is available.
- ◆ Election: elect one or more out of N candidates, with 'competitive election', 'equal number election' and 'quick election'
- ◆ Evaluation: 4-key evaluation: Good, Fair, Poor, Abstain.
- ◆ Utilize multi-level error correction and data encryption technique to ensure information security.
- ◆ Customized voting options and voting methods, support customized language mode or display screen

Technical Specifications

Installation	Desktop
Connection Method	Specialized 8-pin/13-pin connector
Color	Black
Display Parameter	Size: 47×18mm Backlight: white on blue background
Frequency Response	20Hz~20kHz
Sensitivity	-46±4dBV/Pa
VOX Sensitivity	H/M/L(76dB/80dB/82dB)
Microphone Time-out	6~180 s
Equivalent Noise Level	20dBA(SPL)
Max SPL	125dB(THD <3%)
THD	<0.05%
SNR	≥96dB
Mic Type	Electret cardioid directional microphone
Directivity	0°/180°: >20 dB(1kHz)
Mic stem length	standard: 410mm, optional: 310mm/510mm
Input Impedance	2kΩ
Headphone/Mic jack	3.5mm jack mono
Headphone Load	> 16Ω
Headphone Volume	10mW
Built-in Loudspeaker	2W/8Ω
Dimension (L*W*H)	145×173×57mm(without stem)
Weight	800g
Power Supply	24V
Max Power Consumption	< 2.5W
Operating Temperature	0~45℃
Storage Temperature	-20~50℃

Conference Unit Feature Chart

Model Number	Product Description	Gooseneck Microphone	Voting Facilities	Loud speaker	Headphone	LCD Screen	Card Reader
TL-VX4200	Chairman Unit	✓		✓	✓	✓	✓
TL-VD4200	Delegate Unit	✓		✓	✓	✓	✓
TL-VXB4200	Chairman Unit	✓	✓	✓	✓	✓	✓
TL-VDB4200	Delegate Unit	✓	✓	✓	✓	✓	✓

Central Control Unit



The brand new design GONSIN central control unit adopts integrated tempered glass panel and navigational rotary knob design, clear layout and user-friendly. One central control unit is able to accommodate 60-70 microphones. By cascading extension units, the system can support up to 4096 conference units. The central control unit has built-in 4×1 SD video matrix, to support SD video tracking with adding SD cameras; it also supports extended HD video matrix. Built-in DSP digital audio processor is used for feedback prevention, when the sound environment is not ideal, turn on DSP function to avoid feedback. Built-in treble/bass compensation for better sound quality. VOX sensitivity, built-in loudspeaker volume and LCD screen contrast are adjustable by central control unit or by each unit. Unit ID number writing is also included.

◆ Features

- ◆ Black tempered glass panel design, simple and high-end design. All the function divisions are clearly layout and easy to operate.
- ◆ Built-in DSP processor for acoustic feedback prevention.
- ◆ Built-in OLED screen to display system set status.
- ◆ VOX sensitivity adjustable.
- ◆ Built-in 4×1 SD video matrix, and support extended HD video matrix.
- ◆ Supportive SD and HD camera tracking.
- ◆ Built-in treble/bass compensation for better sound quality.
- ◆ Support clock and calendar function,
- ◆ Support plug-in USB disk for audio recording.

Central Control Unit

TL-Z4



Basic functions

- ◆ In compliance with IEC60914 international standard
- ◆ With full digital audio technology, built-in high-speed CPU and high-performance DSP digital audio processor, CD sound quality.
- ◆ Acoustic frequency response can up to 20Hz 20KHz.
- ◆ Black tempered glass panel design, simple and high-end design. All the function divisions are clearly layout and easy to operate.
- ◆ The sever comes with built-in OLED panel to display system status, active mic, speaking mode. Language supports Chinese/ English. Russia, Spanish can be customized.
- ◆ Navigation knob for more convenient operation and management
- ◆ 4 route port to connect conference units, the system has auto-repair function, support hot plug-and-play.
- ◆ One central control unit is able to accommodate 60-70 microphones. By cascading extension units, the system can support upto 4096 conference units.
- ◆ Universal voltage power switch for wider usable range and sufficient power supply.
- ◆ Support USB auto recording: after the front panel is inserted U disk, audio recording can be set automatically or manually. The recording status can be displayed in real time.
- ◆ Optional HD video camera tracking matrix ,switcher or HD camera, can realize HD automatic camera tracking, supporting preset overall view
- ◆ 4*1+1 video matrix is built in the Central Control Unit, and standard definition video conference camera is selected, which can realize automatic camera tracking function of standard definition and support preset overall view
- ◆ Input port for external audio signal: for alarm audio, PA, and other audio systems, the conference units can output audio signals synchronously.
- ◆ Internal clock and calendar, it will be displayed on central control unit, conference units.
- ◆ Built-in auto-detection fo conference units; before conferences, self-test can be run for each conference units.
- ◆ TCP/IP PC communication between central control unit and PC, which can achieve control management, remote fault diagnosis and remote update.

■ Stand-alone Mode Functions:

- ◆ ID number writing: the conference system supports automatically or manually assign ID to the corresponding equipment.
- ◆ All or individual units' VOX sensitivity are adjustable (apply to 5600 series)
- ◆ LCD screen contrast of Unit is adjustable (apply to 4200 series)
- ◆ Speaking mode: Operator, Auto, FIFO, VOX, request to speak (with software).
- ◆ VOX function: in VOX mode, the unit will be activated when user speaks; VOX sensitivity can be adjust by the server (high, middle, low); microphone time-out is adjustable (6-180 seconds).
- ◆ 1-4 delegate unit can be used simultaneously (except chairman unit); chairman/vice chairman unit are not subject to active mic limit, it's allowed to open at any time.
- ◆ The system can have multiple chairman units; delegate unit can be set as vice-chairman units. There are unlimited chairman and vice-chairman units.

■ Extended functions under PC and software control

- ◆ Register function and real-time participants statistics.
- ◆ Centralized conference management, operator can allow or reject delegate request to talk.
- ◆ Speaking time limit can be preset for conference units; After the speaking time is up, the conference unit will be off.
- ◆ Conference audio recording and video recording(need audio video capture card)
- ◆ Delegate unit can be set to be vice-chairman units by software; vice-chairman unit is not subject to active mic limit.
- ◆ Support management software dual-system hot backup function; One control computer can be set as backup and connect to the system; if the current computer has faults, the backup computer can be automatically hosted to ensure the smooth and continuous meeting.
- ◆ Conference management software can be customized.



Central Control Unit

TL-ZB4



Basic functions

- Based on functions of Central Control Unit TL-Z4, Central Control Unit TL-ZB4 has functions below:

Extended functions under PC and software control

- ♦ Voting: Yes, No, Abstain . Vote counting and result display are enabled automatically by PC
 - Single-choice and multiple-choice voting
 - First key-press and final key-press voting
- ♦ Election: elect one or more out of N candidates, with 'competitive election', 'equal number election' and 'quick election'
- ♦ 4-key evaluation: Good, Fair, Poor, Abstain.
- ♦ Utilize multi-level error correction and data encryption technique to ensure information security.
- ♦ Customized voting options and voting methods, support customized language mode or display screen.



◆ Technical Parameters

Max System Capacity	4096
Standard Capacity	60~70(different from various models)
Acoustic Frequency Response	20Hz~20KHz
SNR	>96dBA
Channel Isolation	>85dB
Dynamic Range	>94dB
THD	<0.05%
Power	AC100~240V 50/60Hz
Audio Port	1 balanced (XLR) 2 unbalanced (RCA)
Max Audio Output	LINE OUT : +20 dBu unbalanced BLANCE OUT : +20 dBu balanced
Output Impedance	>1KΩ
External Audio Input	0.775V (PHOENIX terminal)
Central Control Method	RS-232
PC Connection Method	TCP/IP
Camera Control Method	RS-485
Max Power Consumption	300W
Terminal Connection Port	8-pin×4 13-pin×4 (for TC-Z4,TC-ZB4 only)
Channel selection	6 (for TC-Z4,TC-ZB4 only)
Display Screen	OLED (61mm×37mm)
Audio recording port	USB (USB FAT32)
Audio recording File Size	0.8M/m
Active Delegate	1/2/3/4 (not including chairman unit)
VOX sensitivity	H/M/L (76dB/80dB/82dB)
Support Camera Number	4 SD cameras (built-in SD matrix), MAX 8 cameras with extended matrix
Video Input Port	RCA×4 (1Vp-p 75Ω)
Video Output Port	RCA×2 (1Vp-p 75Ω)
Camera Tracking Protocol	PELCO-P/PELCO-D/VISCA
Operating Temperature	-0~45°C
Storage Temperature	-20~50°C
Dimensions (L*W*H)	485mm×350mm×90mm
Installation	Desktop or 19" rack mounting
Weight	7.6Kg



Extension Unit ZJ-KR



Basic functions

- ◆ Confirm to IEC 60914 international standard.
- ◆ With full digital audio technology, built-in high-speed CPU and high-performance DSP digital audio processor.
- ◆ Black tempered glass panel design, simple and high-end design. All the function divisions are clearly layout and easy to operate.
- ◆ Three routes 8-pin ports to connect conferenc units, another two route 8-pin port for system cascading.
- ◆ Three routes 13-pin ports to connect conferenc units, another two route 13-pin port for system cascading.
- ◆ Automatic restoration function: support hot plug and play.
- ◆ One central control unit is able to accommodate 60-70 units. By cascading extension units, the system can support upto 4096 conference units.
- ◆ Universal voltage power switch for wider usable range and sufficient power supply.

Technical Specifications

Max System Capacity	4096
Standard Capacity	60~70(different from various models)
Power	AC100~240V, 50/60Hz
MAX Power	300W
Terminal Connection Port	8-pin ×5, 13-pin×5
Operating Temperature	0~45°C
Storage Temperature	-20~50°C
Dimensions (L*W*H)	485mm×350mm×90mm
Installation	Desktop or 19" rack mounting
Weight	7.6Kg

◆ GONSIN Digital Conference Management System V7.1.0

◆ Basic functions

- ◆ It supports main screen and split screen display; the software interface can be synchronized to the large screen; supports screen resolution adaptation.
- ◆ It has abundant functions, and realizes different software module functions when connected to different matching products; software module customization is available.
- ◆ It is compatible with GONSIN's other equipment, so that data is interconnected between wired products/wireless products/multiple product formats/multiple systems
- ◆ It has Super Dog Data Encryption; LicenseOnChip technology ensures that the license can not be tampered; it support AES algorithm encryption. Using ECC key exchange technology to ensure conference data transmission under encryption protection
- ◆ It has serial number authorization function; when super dog encryption is not used, you can use the software by getting the officially granted authorization code.
- ◆ Log in through the user's account and password; level-oriented management, prohibiting external personnel tampering or leaking conference information. Support different user type settings, including operating users, managing users, backup users, etc.
- ◆ Different languages are available, including Chinese, English and Russian. With language customization function, visual language editing interface, easy for translators to edit and proofread; supports language packet import / export.
- ◆ It has equipment management function, and supports online monitoring of system servers and conference equipment. Support centralized management of equipment, realizing equipment power detection, operation status detection , unified shutdown and other operations
- ◆ It supports personnel data input, including name, photo, position, unit number, seat number, custom type and so on. It supports two modes: online creation and offline creation.
- ◆ It supports auto camera tracking settings; you can choose from a variety of camera/matrix types and switch to corresponding control protocol. Preset bit information can be imported and exported, easy to save and invoke.
- ◆ It supports to create new venues or to open existing venues, and set up the venue background map and arrange seats. The seat setting is suitable for all meetings, and can be invoked through the conference schedule.
- ◆ It supports writing card devices for IC card reading and writing. The card writing device is suitable for all meetings.
- ◆ It supports to create conference name and schedule, and a variety of check-in modes are available, including the key-press registration, card registration, and no card registration.
- ◆ You can set conference topics and related content, including slogans, votes, discussions, manuscripts (support office document insertion) and so on.
- ◆ It supports voting, evaluation, election, grading, and fast election; voting options can be customized, and supports the setting of named voting, secret voting, and weight voting; working with paperless system, it will has the multi-topic batch voting function
- ◆ Support screen customization; you can set text font, color, picture and data association in the visual editing interface. Support for fast switching of multiple interface styles
- ◆ Initiate a conference through the software, supporting personnel registration, slogan display, text display, enter the discussion, start voting and other operations
- ◆ The software supports conference microphone control. It can set speech mode, application, number of speakers, speech time, seat display mode and large screen display mode in real time.
- ◆ The software supports post-conference information processing, and the list of conference personnel, the results of topics and proposals, and documents produced during the conference can be exported and printed. It supports uploading historical data from the cloud (only for some supporting products).
- ◆ Support for the tailor-made software development; interface protocol can be opened to achieve customized development according to needs of the project.

◆ Technical Parameter

Operation system	WIN7/WIN8/WIN10 operation system 32/64 bit
Video card	Independent graphics card supports VGA\HDMI\DVI interface, supporting display and split screen.
CPU	i5 or above
Hard disk capacity	500GB or above
memory capacity	4GB or above
PC interface	1 way RS-232 interface; 2 way RJ45 interface
Resolution ratio	adaptive
Video tracking protocol	PELCO-P/PELCO-D/VISCA
PC communication method	Ethernet/RS-232

◆ Function Introduction





◆ Function Introduction

According to the conference process, it has three main modules: 【Pre-conference settings】 , 【Holding a conference】 and 【Post-conference management】 . The interface is concise and convenient to operate.

■ Pre-conference preparation

Input pre-conference information, including: equipment management, personnel information, camera settings, seating settings, card writing equipment, language settings, conference information, topics and proposals, participants, screen customization, etc.

■ Hold a conference

Support sub-screen display and system control during the conference, including: registration management, topics management, discussion control, etc.


■ Post-conference management

Support information processing after the conference, including: personnel information (list statistics, personnel check, number printing, report printing, etc.), voting results (voting, evaluation, election, grading results check and printing).

- Compatible with other equipments of GONSIN system, capable for working with multiple equipment of varied models. Based on network design, it is suitable for use on WIN7/WIN8/WIN10 operating system.

- Use AES algorithm encryption and ECC key exchange technology, ensuring conference data transmission under encryption protection.



System settings

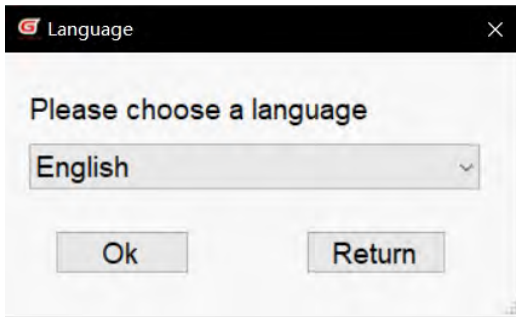

Support multiple languages:

You can choose from Chinese, English and Russian. Through language customization function, you can customize other language interface; it supports for language packet import / export

Pre-conference preparation

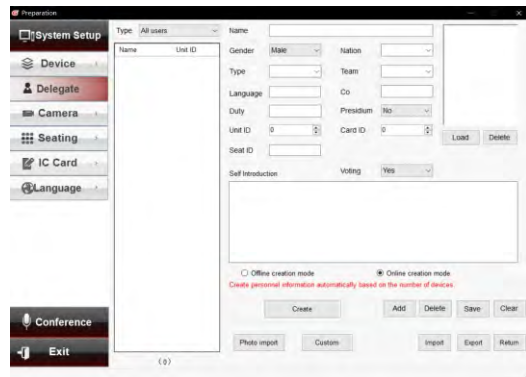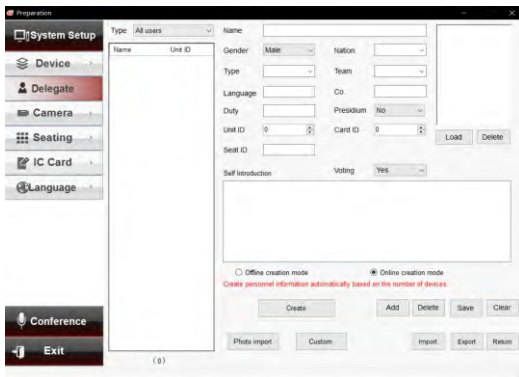

Personnel information:

Input information of participants, including name, photo, position, unit number, seat number, custom type, etc. Support online and offline creation


Camera settings:

Set up auto camera tracking of the conference equipment.




Seat setting:

The layout of the equipment is arranged according to the on-site seats, and you can monitor the process of the conference directly.

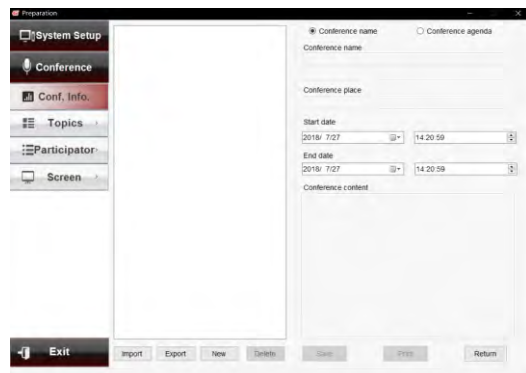


Conference information:

Create or edit conference names and schedules

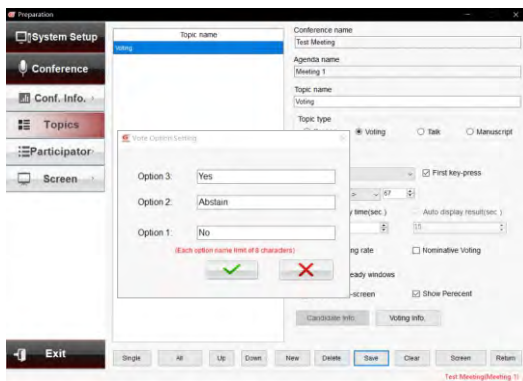

Topics and proposals:


Create or edit topics and proposals. Topics items can be customized. Including slogans, voting, discussion, manuscripts and other settings, more flexible use.

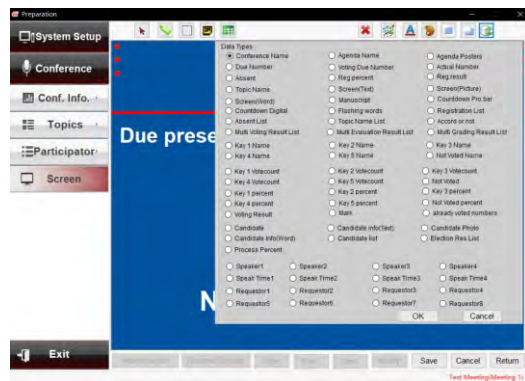

Customizable Screen:

Users can set the relevant contents of the screen display, You can set text font, color, picture and data association in the visual editing interface. Support for fast switching of multiple interface.


Hold a conference

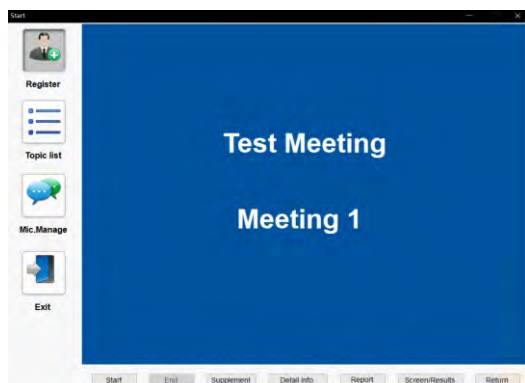

Registration:


Carry out conference registration function, and support key-press registration, card registration and other registration methods

* some devices do not support card registration

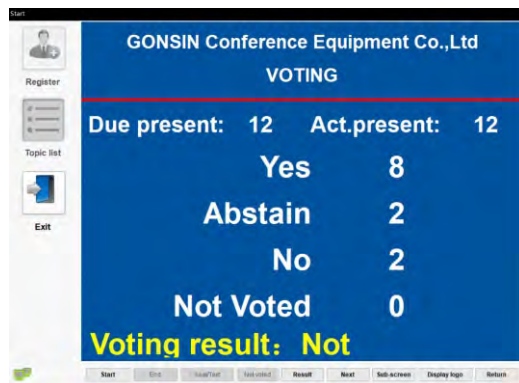

Vote:

The function of meeting voting can be realized by means of voting, deliberation, election, grading, quick election, and custom voting items.

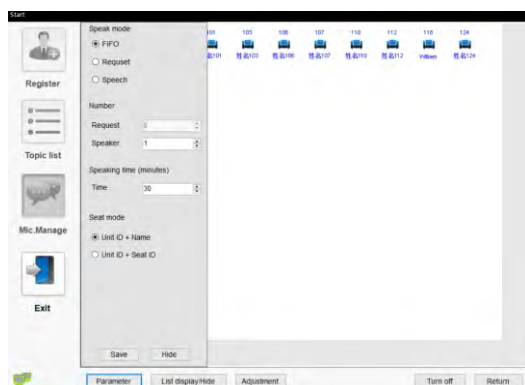

Discussion:

Speaking parameters can be set in real time, such as speaking mode, application, number of speakers, speaking time, seat display mode and large screen display mode.

Post-conference Management

Name	Gender	Unit ID	Card ID	Seat ID	Type	Company	Delegation
姓 名: 23	Male	23	0	23	0		0
姓 名: 100	Male	100	0	100	0		0
姓 名: 101	Male	101	0	101	0		0
姓 名: 103	Male	103	0	103	0		0
姓 名: 106	Male	106	0	106	0		0
姓 名: 107	Male	107	0	107	0		0
姓 名: 110	Male	110	0	110	0		0
姓 名: 112	Male	112	0	112	0		0
姓 名: 118	Male	118	0	118	0		0
姓 名: 124	Male	124	0	124	0		0
姓 名: 128	Male	128	0	128	0		0
姓 名: 142	Male	142	0	142	0		0

After the meeting, you can search and print the results of the conference registration, vote, election, appraisal and grading.

Export the annotated Agenda files.

It supports post-conference information processing, and you can export and print the list of participants, the results of the topics and proposals, and the documents produced during the meeting. It supports uploading historical data from the cloud (only for some supporting products).



◆ Accessories

◆ IC Card Encoder **SRD-U100**

Support read out and write down information, reset password

Speed	<0.2s
Interface	USB
Installation	Flush-mounting



◆ IC Card **BL7442**

Each card has a unique 32-bit serial number and independent password and access control. Users can set different password with software, one card for appointed conference. Data can be preserved up to 10 years and a card can be rewritten up to 100 thousand times with unlimited reading times.

Dimensions	85.6x53.98x0.8 (LxWxD)
Operating temperature	-20°C to 50°C



◆ Extension Cable **8PS-03/05/10/15/20/40**

Color	Black
Type	8PS
Connectors	One male, one female
Length	3/5/10/15/20/40m

Note: Select in according to the conference demand




◆ Connection Cable **8P-T3**

Color	Black
Type	8PS
Connectors	Two male, one female
Length	1.5+1.2m

Note: one piece for one discussion unit



System Configuration

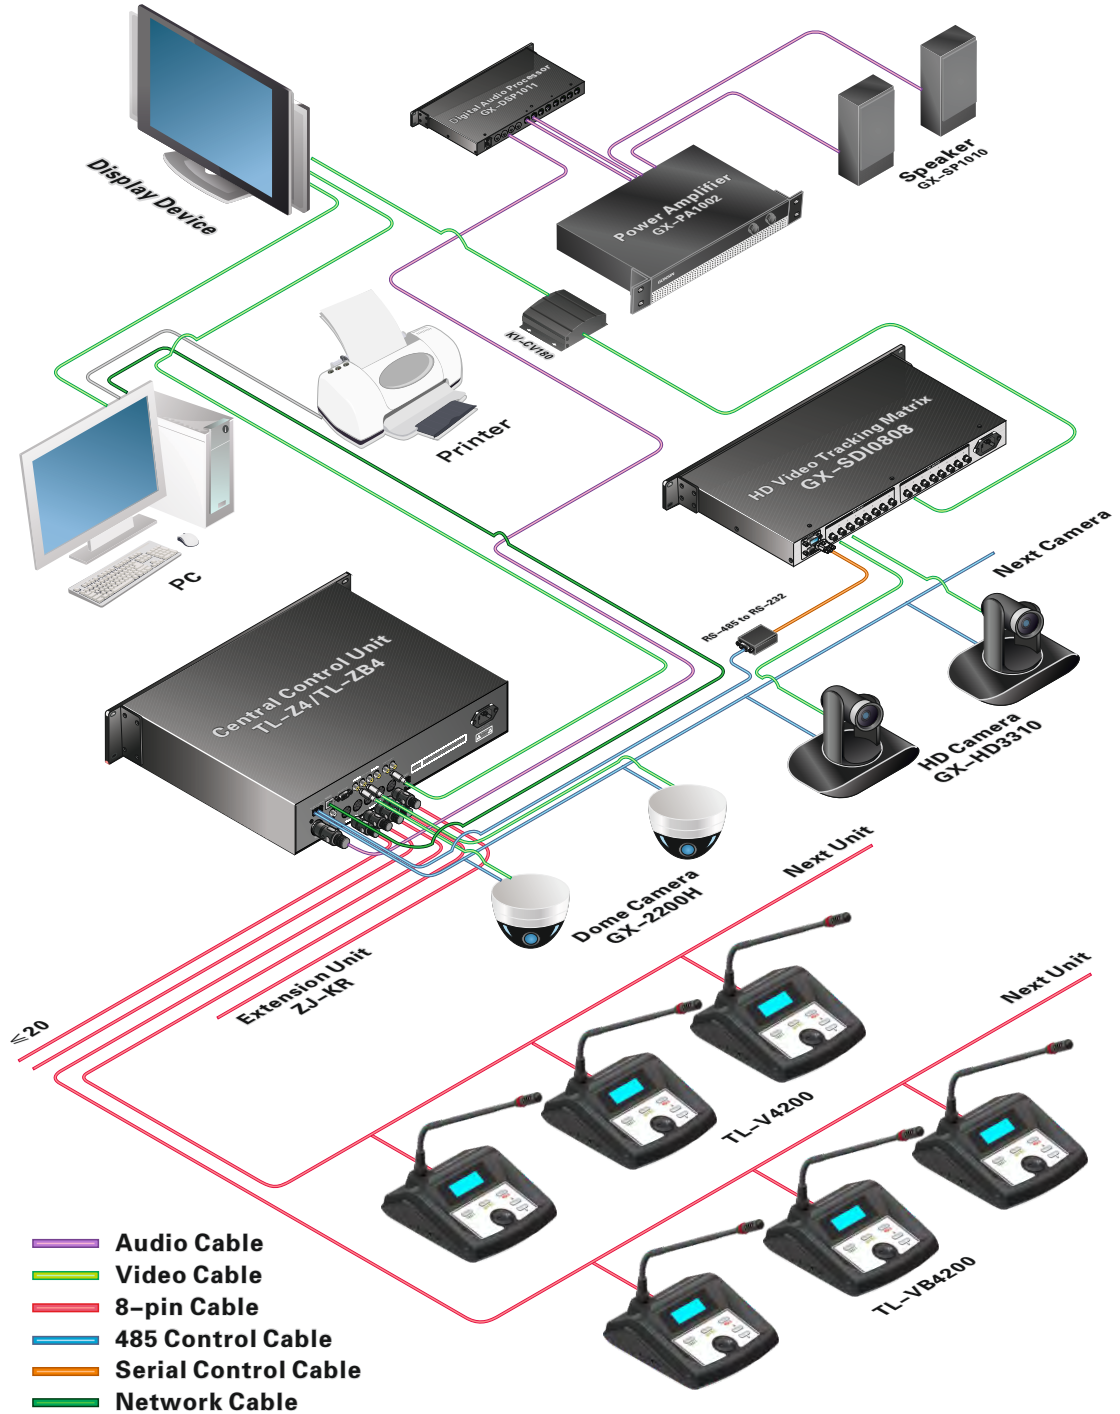

• TL-V4200 / TL-VB4200 system connection diagram

System Components

Model Number	TL-V4200	TL-VB4200
Central Control Unit	TL-Z4	TL-ZB4
Extension Unit	ZJ- KR	ZJ- KR
Chairman Unit	TL-VX4200	TL-VXB4200
Delegate Unit	TL-VD4200	TL-VDB4200
Management Software	V7.1.0 (optional)	V7.1.0
IC Card Encoder		SRD-U100
IC Card		BL7442
T-type connection cable	8P-T3	8P-T3
Extension cable	8PS	8PS



GONSIN CONFERENCE EQUIPMENT CO.,LTD.
www.gonsin.com



English Wechat



All rights reserved. The information and specifications included are subject to change without prior notice.