

TL-4300

Desktop Digital Conference System



GONSIN[®]
Delivering Trust & Value



TL-4300 Desktop Digital Conference System

TL-4300 basic discussion unit allows the delegate to speak, request to speak, listen to speech and automatic camera tracking; other units with extended function can support register attendance, cast a vote, election, evaluation, simultaneous interpretation. Each unit comes with headphone jack and volume control for delegates to listen to floor and interpretation audio, and adjust volume level for comfortable listening. Built-in speaker automatically mutes when microphone is turned on. 1 to 4 delegate microphones can be activated at the same time. The system also comes with voice-activated function, under this mode, the microphone will be activated as the users speak. The sensitivity of voice-activated is adjustable, which makes it more user friendly for normal users and the visually impaired people.

◆ Features

- ◆ Trigonometry design, shows sense of modern science and technology
- ◆ Exquisite manufacturing process
- ◆ Voice-activated function
- ◆ Support multiple chairman units and vice chairman units
- ◆ Support 6 channels wired simultaneous interpretation
- ◆ Built-in dual loudspeaker
- ◆ Support auto camera tracking function (SD and HD)
- ◆ OLCD to display the unit status
- ◆ Three-color LED to indicate the unit status (on or off)
- ◆ Built-in clock to display time
- ◆ Electret cardioid directional microphone, rich timbre
- ◆ Pluggable gooseneck microphone stem, red ring illuminant to indicate active mic
- ◆ Highly resistant to mobile phone interference
- ◆ Flexible installation for units connection (hidden or not), makes the assembly room more elegant



Basic Functions

- ◆ In compliance with IEC60914 international standard.
- ◆ Trigonometry design, shows sense of modern science and technology.
- ◆ Three-color LED to indicate the unit status (on or off).
- ◆ Physical Mic button utilizes key-press design, with concise appearance, convenient operation, accurate response and long service life.
- ◆ The terminal has hidden connecting cable, which supports hidden or open installation, to make organized table.
- ◆ Automatic restoration function: supports hot plug.
- ◆ Pluggable gooseneck microphone stem, convenient for equipment maintenance.
- ◆ Highly resistant to mobile phone interference.
- ◆ The sever comes with built-in OLED panel to display clock, unit status, speaking mode, registration, voting, language, volume etc.
- ◆ Display time during the conference.
- ◆ Unique ID number, the conference system supports automatically or manually assigns ID to the corresponding equipment.
- ◆ With headphone jack (Ø 3.5 mm) and adjustable volume.
- ◆ Built-in MIC (Ø 3.5 mm) to connect with external MIC, which meets the requirements of different usage scenarios.
- ◆ Built-in left and right loudspeakers (2W) and adjustable volume (0-9 level) . Reasonable design makes clear and bright sound.
- ◆ Attendance registration function: by keypress, by numbered card, by un-numbered card, or supplementary registration.
- ◆ Optional HD video camera tracking matrix ,switcher or HD camera, can realize HD automatic camera tracking, supporting preset overall view.
- ◆ 4*1+1 video matrix is built in the Central Control Unit, and standard definition video conference camera is selected, which can realize automatic camera tracking function of standard definition and support preset overall view.
- ◆ Speaking mode: Operator, Auto, FIFO, VOX, request to speak (with software).
- ◆ VOX function: in VOX mode, the unit will be activated when user speaks; VOX sensitivity can be adjusted (high, middle, low); microphone time-out is adjustable (6-180 seconds).
- ◆ 1-4 delegate unit can be used simultaneously (except chairman unit); chairman/vice chairman unit are not subject to active mic limit, it's allowed to open at any time.
- ◆ The system can have multiple chairman units; delegate unit can be set as vice-chairman units. Numbers of chairman and vice-chairman units are unlimited.

The chairman unit has exclusive functions below:

- ◆ Chairman units can be activated at any time without presetting mic limit
- ◆ Chairman unit has priority key to override all active delegate units



TL-VX4300



TL-VD4300



TL-VXB4300



TL-VDB4300

■ **Based on functions of TL-V4300, TL-VB4300 unit(discussion, voting) has functions below:**

- ◆ Voting: Yes/No/Abstain . Vote counting and result display are enabled automatically by PC
- Single-choice and multiple-choice voting
- First key-press and final key-press voting
- ◆ Election: elect one or more out of N candidates, with 'competitive election', 'equal number election' and 'quick election'
- ◆ Evaluation: 4-key evaluation: Good, Fair, Poor, Abstain.
- ◆ Utilize multi-level error correction and data encryption technique to ensure information security.
- ◆ Customized voting options and voting methods, support customized language mode or display screen

■ **Based on functions of TL-V4300, TL-VC4300 unit (discussion,interpretation) has functions below:**

- ◆ Language interpretation: 1+5 channels.
- ◆ Built-in language channel selector (with headphone plugged in)
- ◆ Acoustic frequency response can up to 20Hz~20KHz.



TL-VDC4300

■ **Based on functions of TL-V4300, TL-VCB4300 unit (discussion,voting, interpretation)has functions below:**

- ◆ Voting: Yes/No/Abstain. Vote counting and result display are enabled automatically by PC
- Single-choice and multiple-choice voting
- First key-press and final key-press voting
- ◆ Election: elect one or more out of N candidates, with 'competitive election', 'equal number election' and 'quick election'
- ◆ 4-key evaluation: Good, Fair, Poor, Abstain.
- ◆ Utilize multi-level error correction and data encryption technique to ensure information security.
- ◆ Customized voting options and voting methods, support customized language mode or display screen
- ◆ Language interpretation: 1+5 channels.
- ◆ Built-in language channel selector (with headphone plugged in)
- ◆ Acoustic frequency response can up to 20Hz~20KHz.



TL-VXCB4300



TL-VDCB4300

Technical Parameters

| | |
|------------------------|---|
| Installation | Desktop |
| Connection Method | Specialized 8-pin/13-pin cable |
| Color | Black |
| Display Parameter | OLED, Dimension: 35mm×18mm |
| Frequency Response | 20Hz~20KHz |
| Sensitivity | -46±4dBV/Pa |
| VOX Sensitivity | H/M/L(76dB/80dB/82dB) |
| Microphone Time-out | 6~180 seconds |
| Equivalent Noise Level | 20dBA (SPL) |
| Max SPL | 125dB(THD<3%) |
| THD | <0.05% |
| SNR | ≥96dB |
| Mic Type | Electret cardioid directional microphone |
| Directivity | 0°/180°: >20 dB (1 kHz) |
| Mic stem length | Standard :410mm; Optional :310mm/510mm |
| Input Impedance | 2KΩ |
| Headphone/Mic jack | Ø3.5 mm stereo jack×2 |
| Headphone Load | >16Ω |
| Headphone Volume | 10mW |
| Built-in Loudspeaker | 2×2W/8Ω |
| Interpretation Channel | 6 |
| Dimension (L*W*H) | 145mm×170mm×71mm (not including mic stem) |
| Weight | 0.6Kg |
| Power Supply | 24V |
| Max Power Consumption | <7W |
| Operating Temperature | 0~45°C |
| Storage Temperature | -20~50°C |

Conference Unit Feature Chart

| Model Number | Product Description | Gooseneck Microphone /Card reader | Loud speaker | Voting Facilities | Channel selector | Language | OLED Screen | Installation | Host Configuration |
|--------------|---------------------|-----------------------------------|--------------|-------------------|------------------|-----------------|-------------|--------------|--------------------|
| TL-VX4300 | Chairman | √ | √ | | | Chinese/English | √ | Desktop | TL-Z4 |
| TL-VD4300 | Delegate | √ | √ | | | Chinese/English | √ | Desktop | |
| TL-VXB4300 | Chairman | √ | √ | √ | | Chinese/English | √ | Desktop | TL-ZB4 |
| TL-VDB4300 | Delegate | √ | √ | √ | | Chinese/English | √ | Desktop | |
| TL-VDC4300 | Delegate | √ | √ | | √ | Chinese/English | √ | Desktop | TC-Z4 |
| TL-VXCB4300 | Chairman | √ | √ | √ | √ | Chinese/English | √ | Desktop | TC-ZB4 |
| TL-VDCB4300 | Delegate | √ | √ | √ | √ | Chinese/English | √ | Desktop | |

Central Control Unit



The brand new design GONSIN central control unit adopts integrated tempered glass panel and navigational rotary knob design, clear layout and user-friendly. One central control unit is able to accommodate 60-70 microphones. By cascading extension units, the system can support up to 4096 conference units. The central control unit has built-in 4×1 SD video matrix, to support SD video tracking with adding SD cameras; it also supports extended HD video matrix. Built-in DSP digital audio processor is used for feedback prevention, when the sound environment is not ideal, turn on DSP function to avoid feedback. Built-in treble/bass compensation for better sound quality. VOX sensitivity, built-in loudspeaker volume and LCD screen contrast are adjustable by central control unit or by each unit. Unit ID number writing is also included.

◆ Features

- ◆ Black tempered glass panel design, simple and high-end design. All the function divisions are clearly layout and easy to operate.
- ◆ Built-in DSP processor for acoustic feedback prevention.
- ◆ Built-in OLED screen to display system set status.
- ◆ VOX sensitivity adjustable.
- ◆ Built-in 4×1 SD video matrix, and support extended HD video matrix.
- ◆ Supportive SD and HD camera tracking.
- ◆ Built-in treble/bass compensation for better sound quality.
- ◆ Support clock and calendar function,
- ◆ Support plug-in USB disk for audio recording.

Central Control Unit

TL-Z4



Basic functions

- ◆ In compliance with IEC60914 international standard
 - ◆ With full digital audio technology, built-in high-speed CPU and high-performance DSP digital audio processor, CD sound quality.
 - ◆ Acoustic frequency response can up to 20Hz~20KHz.
 - ◆ Black tempered glass panel design, simple and high-end design. All the function divisions are clearly layout and easy to operate.
 - ◆ The sever comes with built-in OLED panel to display system status, active mic, speaking mode. Language supports Chinese/ English. Russia, Spanish can be customized.
 - ◆ Navigation knob for more convenient operation and management
 - ◆ 4 route port to connect conference units, the system has auto-repair function, support hot plug-and-play.
 - ◆ One central control unit is able to accommodate 60-70 microphones. By cascading extension units, the system can support upto 4096 conference units.
 - ◆ Universal voltage power switch for wider usable range and sufficient power supply.
 - ◆ Support USB auto recording: after the front panel is inserted U disk, audio recording can be set automatically or manually. The recording status can be displayed in real time.
 - ◆ Optional HD video camera tracking matrix ,switcher or HD camera, can realize HD automatic camera tracking, supporting preset overall view
 - ◆ 4*1+1 video matrix is built in the Central Control Unit, and standard definition video conference camera is selected, which can realize automatic camera tracking function of standard definition and support preset overall view
 - ◆ Input port for external audio signal: for alarm audio, PA, and other audio systems, the conference units can output audio signals synchronously.
 - ◆ Internal clock and calendar, it will be displayed on central control unit, conference units.
 - ◆ Built-in auto-detection fo conference units; before conferences, self-test can be run for each conference units.
 - ◆ TCP/IP PC communication between central control unit and PC, which can achieve control management, remote fault diagnosis and remote update.
- **Stand-alone Mode Functions:**
- ◆ ID number writing: the conference system supports automatically or manually assign ID to the corresponding equipment.
 - ◆ All or individual units' VOX sensitivity are adjustable (apply to 5600 series)
 - ◆ LCD screen contrast of Unit is adjustable (apply to 4200 series)

- ◆ Speaking mode: Operator, Auto, FIFO, VOX, request to speak (with software).
- ◆ VOX function: in VOX mode, the unit will be activated when user speaks; VOX sensitivity can be adjust by the server (high, middle, low); microphone time-out is adjustable (6-180 seconds).
- ◆ 1-4 delegate unit can be used simultaneously (except chairman unit); chairman/vice chairman unit are not subject to active mic limit, it's allowed to open at any time.
- ◆ The system can have multiple chairman units; delegate unit can be set as vice-chairman units. There are unlimited chairman and vice-chairman units.

■ **Extended functions under PC and software control**

- ◆ Register function and real-time participants statistics.
- ◆ Centralized conference management, operator can allow or reject delegate request to talk.
- ◆ Speaking time limit can be preset for conference units; After the speaking time is up, the conference unit will be off.
- ◆ Conference audio recording and video recording(need audio video capture card)
- ◆ Delegate unit can be set to be vice-chairman units by software; vice-chairman unit is not subject to active mic limit.
- ◆ Support management software dual-system hot backup function; One control computer can be set as backup and connect to the system; if the current computer has faults, the backup computer can be automatically hosted to ensure the smooth and continuous meeting.
- ◆ Conference management software can be customized.

◆ Central Control Unit

TL-ZB4



◆ Basic functions

■ **Based on functions of Central Control Unit TL-Z4, Central Control Unit TL-ZB4 has functions below:**
Extended functions under PC and software control

- ◆ Voting: Yes, No, Abstain . Vote counting and result display are enabled automatically by PC
 - Single-choice and multiple-choice voting
 - First key-press and final key-press voting
- ◆ Election: elect one or more out of N candidates, with 'competitive election', 'equal number election' and 'quick election'
- ◆ 4-key evaluation: Good, Fair, Poor, Abstain.
- ◆ Utilize multi-level error correction and data encryption technique to ensure information security.
- ◆ Customized voting options and voting methods, support customized language mode or display screen.

Central Control Unit

TC-Z4



Basic functions

- Based on functions of Central Control Unit TL-Z4, Central Control Unit TC-Z4 has functions below:
 - ◆ Language interpretation: 1+5 channels.
 - ◆ Acoustic frequency response can up to 20Hz~20KHz.
 - ◆ With interpreter unit and language distribution port, it can connect Gonsin IR simultaneous interpretation system or FS-FHSS wireless simultaneous interpretation system for compatible use.

Central Control Unit

TC-ZB4



Basic functions

- Extended functions under PC and software control
 - ◆ Voting: Yes, No, Abstain . Vote counting and result display are enabled automatically by PC
 - Single-choice and multiple-choice voting
 - First key-press and final key-press voting
 - ◆ Election: elect one or more out of N candidates, with 'competitive election', 'equal number election' and 'quick election'
 - ◆ 4-key evaluation: Good, Fair, Poor, Abstain.
 - ◆ Utilize multi-level error correction and data encryption technique to ensure information security.
 - ◆ Customized voting options and voting methods, support customized language mode or display screen
 - ◆ Language interpretation: 1+5 channels.
 - ◆ Acoustic frequency response can up to 20Hz~20KHz.
 - ◆ With interpreter unit and language distribution port, it can connect Gonsin IR simultaneous interpretation system or FS-FHSS wireless simultaneous interpretation system for compatible use.

◆ Technical Parameters

| | |
|-----------------------------|---|
| Max System Capacity | 4096 |
| Standard Capacity | 60~70(different from various models) |
| Acoustic Frequency Response | 20Hz~20KHz |
| SNR | >96dBA |
| Channel Isolation | >85dB |
| Dynamic Range | >94dB |
| THD | <0.05% |
| Power | AC100~240V, 50/60Hz |
| Audio Port | 1 balanced (XLR) 2 unbalanced (RCA) |
| Max Audio Output | LINE OUT : +20 dBu unbalanced BLANCE OUT : +20 dBu balanced |
| Output Impedance | >1K Ω |
| External Audio Input | 0.775V (PHOENIX terminal) |
| Central Control Method | RS-232 |
| PC Connection Method | TCP/IP |
| Camera Control Method | RS-485 |
| Max Power Consumption | 300W |
| Terminal Connection Port | 8-pin \times 4 13-pin \times 4 (for TC-Z4,TC-ZB4 only) |
| Channel selection | 6 (for TC-Z4,TC-ZB4 only) |
| Display Screen | OLED (61mm \times 37mm) |
| Audio recording port | USB (USB: FAT32) |
| Audio recording File Size | 0.8M/m |
| Active Delegate | 1/2/3/4 (not including chairman unit) |
| VOX sensitivity | H/M/L (76dB/80dB/82dB) |
| Support Camera Number | 4 SD cameras (built-in SD matrix), MAX 8 cameras with extended matrix |
| Video Input Port | RCA \times 4 (1Vp-p 75 Ω) |
| Video Output Port | RCA \times 2 (1Vp-p 75 Ω) |
| Camera Tracking Protocol | PELCO-P/PELCO-D/VISCA |
| Operating Temperature | -0~45 $^{\circ}$ C |
| Storage Temperature | -20~50 $^{\circ}$ C |
| Dimensions (L*W*H) | 485mm \times 350mm \times 90mm |
| Installation | Desktop or 19" rack mounting |
| Weight | 7.6Kg |



Extension Unit ZJ-KR



Basic functions

- ◆ Confirm to IEC 60914 international standard.
- ◆ With full digital audio technology, built-in high-speed CPU and high-performance DSP digital audio processor.
- ◆ Black tempered glass panel design, simple and high-end design. All the function divisions are clearly layout and easy to operate.
- ◆ Three routes 8-pin ports to connect conferenc units, another two route 8-pin port for system cascading.
- ◆ Three routes 13-pin ports to connect conferenc units, another two route 13-pin port for system cascading.
- ◆ Automatic restoration function: support hot plug and play.
- ◆ One central control unit is able to accommodate 60-70 units. By cascading extension units, the system can support upto 4096 conference units.
- ◆ Universal voltage power switch for wider usable range and sufficient power supply.

Technical Specifications

| | |
|--------------------------|--------------------------------------|
| Max System Capacity | 4096 |
| Standard Capacity | 60~70(different from various models) |
| Power | AC100~240V, 50/60Hz |
| MAX Power | 300W |
| Terminal Connection Port | 8-pin ×5, 13-pin×5 |
| Operating Temperature | 0~45°C |
| Storage Temperature | -20~50°C |
| Dimensions (L*W*H) | 485mm×350mm×90mm |
| Installation | Desktop or 19" rack mounting |
| Weight | 7.6Kg |

◆ GONSIN Digital Conference Management System V7.1.0

◆ Basic functions

- ◆ It supports main screen and split screen display; the software interface can be synchronized to the large screen; supports screen resolution adaptation.
- ◆ It has abundant functions, and realizes different software module functions when connected to different matching products; software module customization is available.
- ◆ It is compatible with GONSIN's other equipment, so that data is interconnected between wired products/wireless products/multiple product formats/multiple systems
- ◆ It has Super Dog Data Encryption; LicenseOnChip technology ensures that the license can not be tampered; it support AES algorithm encryption. Using ECC key exchange technology to ensure conference data transmission under encryption protection
- ◆ It has serial number authorization function; when super dog encryption is not used, you can use the software by getting the officially granted authorization code.
- ◆ Log in through the user's account and password; level-oriented management, prohibiting external personnel tampering or leaking conference information. Support different user type settings, including operating users, managing users, backup users, etc.
- ◆ Different languages are available, including Chinese, English and Russian. With language customization function, visual language editing interface, easy for translators to edit and proofread; supports language packet import / export.
- ◆ It has equipment management function, and supports online monitoring of system servers and conference equipment. Support centralized management of equipment, realizing equipment power detection, operation status detection , unified shutdown and other operations
- ◆ It supports personnel data input, including name, photo, position, unit number, seat number, custom type and so on. It supports two modes: online creation and offline creation.
- ◆ It supports auto camera tracking settings; you can choose from a variety of camera/matrix types and switch to corresponding control protocol. Preset bit information can be imported and exported, easy to save and invoke.
- ◆ It supports to create new venues or to open existing venues, and set up the venue background map and arrange seats. The seat setting is suitable for all meetings, and can be invoked through the conference schedule.
- ◆ It supports writing card devices for IC card reading and writing. The card writing device is suitable for all meetings.
- ◆ It supports to create conference name and schedule, and a variety of check-in modes are available, including the key-press registration, card registration, and no card registration.
- ◆ You can set conference topics and related content, including slogans, votes, discussions, manuscripts (support office document insertion) and so on.
- ◆ It supports voting, evaluation, election, grading, and fast election; voting options can be customized, and supports the setting of named voting, secret voting, and weight voting; working with paperless system, it will has the multi-topic batch voting function
- ◆ Support screen customization; you can set text font, color, picture and data association in the visual editing interface. Support for fast switching of multiple interface styles
- ◆ Initiate a conference through the software, supporting personnel registration, slogan display, text display, enter the discussion, start voting and other operations
- ◆ The software supports conference microphone control. It can set speech mode, application, number of speakers, speech time, seat display mode and large screen display mode in real time.
- ◆ The software supports post-conference information processing, and the list of conference personnel, the results of topics and proposals, and documents produced during the conference can be exported and printed. It supports uploading historical data from the cloud (only for some supporting products).
- ◆ Support for the tailor-made software development; interface protocol can be opened to achieve customized development according to needs of the project.

Technical Parameter

| | |
|-------------------------|---|
| Operation system | WIN7/WIN8/WIN10 operation system 32/64 bit |
| Video card | Independent graphics card supports VGA\HDMI\DVI interface, supporting display and split screen. |
| CPU | i5 or above |
| Hard disk capacity | 500GB or above |
| memory capacity | 4GB or above |
| PC interface | 1 way RS-232 interface; 2 way RJ45 interface |
| Resolution ratio | adaptive |
| Video tracking protocol | PELCO-P/PELCO-D/VISCA |
| PC communication method | Ethernet/RS-232 |

Function Introduction





◆ Function Introduction

According to the conference process, it has three main modules: 【Pre-conference settings】 , 【Holding a conference】 and 【Post-conference management】 . The interface is concise and convenient to operate.

■ Pre-conference preparation

Input pre-conference information, including: equipment management, personnel information, camera settings, seating settings, card writing equipment, language settings, conference information, topics and proposals, participants, screen customization, etc.

■ Hold a conference

Support sub-screen display and system control during the conference, including: registration management, topics management, discussion control, etc.


■ Post-conference management

Support information processing after the conference, including: personnel information (list statistics, personnel check, number printing, report printing, etc.), voting results (voting, evaluation, election, grading results check and printing).

- Compatible with other equipments of GONSIN system, capable for working with multiple equipment of varied models. Based on network design, it is suitable for use on WIN7/WIN8/WIN10 operating system.

- Use AES algorithm encryption and ECC key exchange technology, ensuring conference data transmission under encryption protection.


System settings

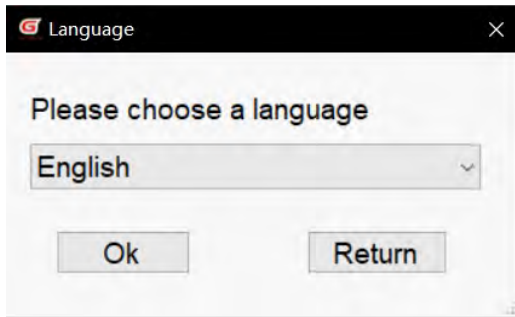

Support multiple languages:


You can choose from Chinese, English and Russian. Through language customization function, you can customize other language interface; it supports for language packet import / export

Pre-conference preparation

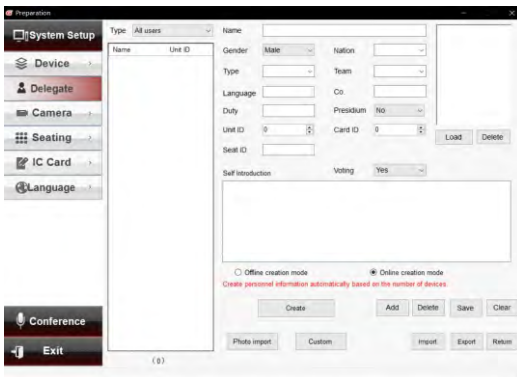

Personnel information:

Input information of participants, including name, photo, position, unit number, seat number, custom type, etc. Support online and offline creation

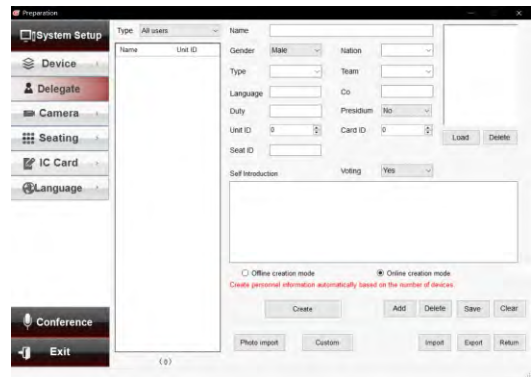


Camera settings:

Set up auto camera tracking of the conference equipment.




Seat setting:

The layout of the equipment is arranged according to the on-site seats, and you can monitor the process of the conference directly.

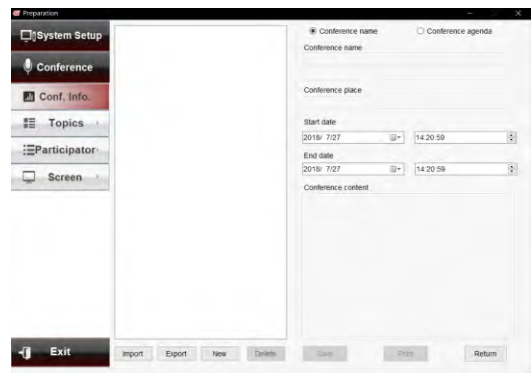


Conference information:

Create or edit conference names and schedules

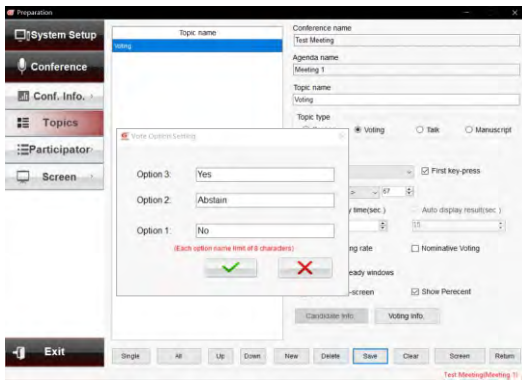

Topics and proposals:


Create or edit topics and proposals. Topics items can be customized. Including slogans, voting, discussion, manuscripts and other settings, more flexible use.

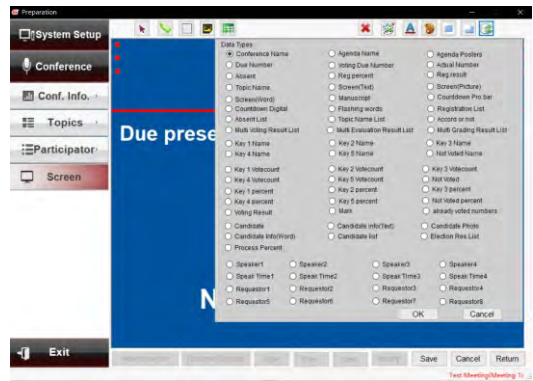

Customizable Screen:

Users can set the relevant contents of the screen display, You can set text font, color, picture and data association in the visual editing interface. Support for fast switching of multiple interface.

Hold a conference

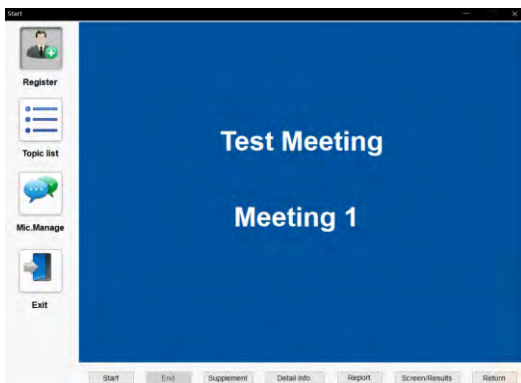


Registration:

Carry out conference registration function, and support key-press registration, card registration and other registration methods
 * some devices do not support card registration



Vote:

The function of meeting voting can be realized by means of voting, deliberation, election, grading, quick election, and custom voting items.

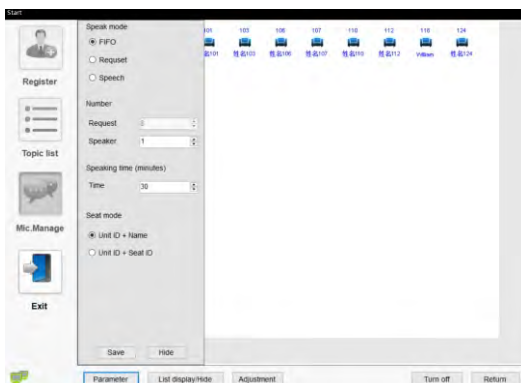


Discussion:

Speaking parameters can be set in real time, such as speaking mode, application, number of speakers, speaking time, seat display mode and large screen display mode.

Post-conference Management

| Name | Gender | Unit ID | Card ID | Seat ID | Type | Company | Delegation |
|---------|--------|---------|---------|---------|------|---------|------------|
| REG100 | Male | 23 | 0 | 23 | 0 | | |
| REG100 | Male | 100 | 0 | 100 | 0 | | |
| REG101 | Male | 101 | 0 | 101 | 0 | | |
| REG103 | Male | 103 | 0 | 103 | 0 | | |
| REG106 | Male | 106 | 0 | 106 | 0 | | |
| REG107 | Male | 107 | 0 | 107 | 0 | | |
| REG110 | Male | 110 | 0 | 110 | 0 | | |
| REG112 | Male | 112 | 0 | 112 | 0 | | |
| William | Male | 118 | 0 | 118 | 0 | | |
| REG124 | Male | 124 | 0 | 124 | 0 | | |
| REG129 | Male | 129 | 0 | 129 | 0 | | |
| REG142 | Male | 142 | 0 | 142 | 0 | | |

After the meeting, you can search and print the results of the conference registration, vote, election, appraisal and grading.

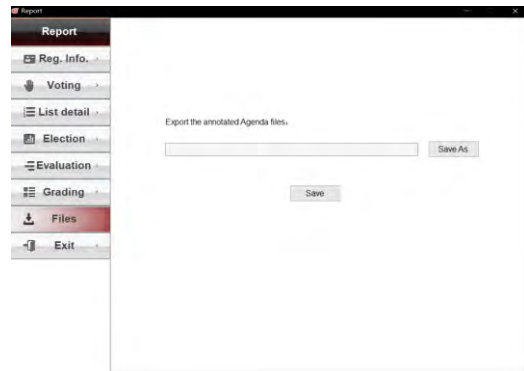

It supports post-conference information processing, and you can export and print the list of participants, the results of the topics and proposals, and the documents produced during the meeting. It supports uploading historical data from the cloud (only for some supporting products).



Interpreter Console

TC-F06/16

Interpreter Console is an indispensable part of simultaneous interpretation system, which is used for simultaneous translation of conference speeches by interpreters. When using, the interpreter can only connect the interpreter console with the simultaneous interpreting main control unit / discussion main control unit, and the translated speech can be transmitted to the main control unit through the interpreter unit. Through the processing and transmission by the system, the participants can listen to the speech content of various languages through the receiving unit / discussion unit. There are two types of the interpreter console Interpreter Console, which support 6 to 16 languages simultaneous interpretation.

Basic Functions

- ◆ Support up to 6/16 channels simultaneous interpretation
- ◆ LCD screen can display various information
- ◆ Support direct interpretation and relay interpretation
- ◆ Support dual microphone translation in turn
- ◆ With microphone selection function
- ◆ 3 output volume levels adjustable
- ◆ Interpretation timing function
- ◆ Speaking speed remind function
- ◆ Pluggable dual soft tubes gooseneck microphone stem



Basic Functions

- ◆ In compliance with IEC60914 international standard
- ◆ The design of physical buttons / knobs are sensitive with good touch, with long service life and without mechanical button sound
- ◆ It adopts 25P parallel port (1 male and 1 female) cable for hand-in-hand connection
- ◆ Automatic restoration function: supports hot plug
- ◆ Support 6/16 channels simultaneous interpretation(including the floor channel)
- ◆ Support direct interpretation and relay interpretation
- ◆ High brightness 128×64 graphic LCD screen with backlight: display setting information ,input and output channel information
- ◆ With channel selection button, it is convenient to select the language from all the input language channels
- ◆ With the indicator of FLOOR/RELAY input channel
- ◆ 3 input channels can be preset with corresponding shortcut button and input channel occupancy indicator
- ◆ 2 output channels can be preset with corresponding shortcut buttons. When all interpreter consoles are closed, the output channel can automatically switch to the floor channel
- ◆ Standard cardioid directional electret microphone with indicator ring; multiple soft gooseneck microphone stems can be selected (standard: 410mm, optional:310mm/510mm)
- ◆ Pluggable microphone stem; During the meeting recess, it can be disassembled for equipment maintenance.

- ◆ Built-in 2W loudspeaker with volume switch; Can play the floor channel or interpreted channel language
- ◆ With the same channel interlock function, when the output channel is preset, the occupied channel will skip automatically.
- ◆ MUTE key to enable a brief muting of the microphone for cough cut
- ◆ Speaking speed remind function, the interpreter can press the "slow" key to remind the speaker to slow down the speaking speed (The microphone's indicator ring or screen will flash)
- ◆ Left and right headphone output jack (3.5 mm×2), connect the headset to listen to the floor or interpreted channel language, with left and right selection buttons; headphone volume is adjustable
- ◆ Left and right microphone input jack (3.5 mm×2), can be connected to external microphone, with left and right selection buttons, to meet different usage scenarios
- ◆ Left and right recording output jack (3.5 mm×2), can be connected to recording device, with left and right selection buttons, the output audio depends on the channel listened by the interpreter console
- ◆ Highly resistant to mobile phone interference
- ◆ Interpretation timing function (timing unit: hour/minute)

◆ Technical Specifications

| | |
|------------------------|---|
| Installation Way | Desktop |
| Connection Way | Specialized 25 core connector |
| | Size: 65mm × 32mm |
| Display Specifications | Lattice: 128 × 64 |
| | Backlight: blue background white characters |
| Frequency Range | 20Hz~20KHz |
| Sensitivity | -46 dBV/Pa |
| Equivalent Noise Level | 20dBA(SPL) |
| Max. SPL | 125dB(THD<3%) |
| THD | <0.05% |
| SNR | ≥96dB |
| Microphone Type | Cardioid directional electret |
| Directivity | 0°/180°: >20 dB (1 kHz) |
| MIC Stem Length | 410mm (standard); 310mm/510mm (optional) |
| Input Impedance | 2KΩ |
| Headphone Output Jack | 3.5 mm jack×2 |
| Microphone Input Jack | 3.5 mm jack×2 |
| Recording Output Jack | 3.5 mm jack×2 |
| Headphone Load | >16Ω |
| Headphone Volume | 10mW |
| Built-in Loudspeaker | 2W/8Ω |
| Channel Number | 6/16 channel (including the floor channel) |
| Power supply | 24V |
| Max. Power Consumption | <5W |
| Dimensions(L×W×H) | 247mm×145mm×95mm(Not including the stem) |
| Net weight | 1.2Kg |
| Working Temperature | 0~45°C |
| Storage Temperature | -20~50°C |

◆ Accessories

◆ Monaural Headphone TC-D1

| | |
|-------------------------|---------------------------------|
| Color | Black ring with embedding metal |
| Type | Monaural mono headphone |
| Interface | 3.5mm |
| Impedance | 40Ω±10% |
| Frequency reponse range | 7 Hz - 24KHz |
| Voltage | 0.4V |
| Input power | 8-50mW |
| Distortion rate | <5% |
| Sensitivity | L1102dB±3dB |



◆ Stereo Headphone TC-D3

| | |
|-------------------------|------------------|
| Color | Black |
| Type | Stereo headphone |
| Interface | 3.5mm |
| Impedance | 32Ω±15% |
| Frequency reponse range | 20-20KHz |
| Voltage | 0.8V |
| Input power | 30-50mW |
| Distortion rate | <5% |



◆ Interpreter Headset TC-D4

| Product Weight | | Headset Specifications | |
|----------------------------------|----------------|------------------------|------------------|
| Product Weight | 180g | Trumpet | Diameter 40mm |
| Microphone Specifications | | Impedance | 32Ω |
| MIC | Diameter 6.5mm | Sensitivity | 105±3dB |
| Impedance | 2200Ω | Rated power | ≥100mW |
| Sensitivity | -58dB±3dB | Frequency response | 15Hz-30KHz |
| Directionality | Directivity | Wire length | 2.2M |
| S/N ratio | Above 60dB | Volume adjustment | Gear tuning |
| Frequency range | 20Hz-20kHz | Port | Dual 3.5mm ports |
| Operating voltage | 4.5V | | |



◆ IC Card Encoder SRD-U100

Support read out and write down information, reset password

| | |
|--------------|----------------|
| Speed | <0.2s |
| Interface | USB |
| Installation | Flush-mounting |



◆ IC Card **BL7442**

Each card has a unique 32-bit serial number and independent password and access control. Users can set different password with software, one card for appointed conference. Data can be preserved up to 10 years and a card can be rewritten up to 100 thousand times with unlimited reading times.

| | |
|-----------------------|------------------------|
| Dimensions | 85.6x53.98x0.8 (LxWxD) |
| Operating temperature | -20°C to 50°C |



◆ Extension Cable **13PS-03/05/10/15/20**

| | |
|--|----------------------|
| Color | Black |
| Type | 13PS |
| Connectors | One male, one female |
| Length | 3/5/10/15/20m |
| Note: Choose in according to the conference demand | |



◆ Connection Cable **13P-T3**

| | |
|--------------------------------|----------------------|
| Color | Black |
| Type | 13PS |
| Connectors | Two male, one female |
| Length | 1.5+1.2m |
| Note: For each discussion unit | |



◆ Extension Cable **8PS-03/05/10/15/20/40**

| | |
|--|----------------------|
| Color | Black |
| Type | 8PS |
| Connectors | One male, one female |
| Length | 3/5/10/15/20/40m |
| Note: Select in according to the conference demand | |



◆ Connection Cable **8P-T3**

| | |
|---|----------------------|
| Color | Black |
| Type | 8PS |
| Connectors | Two male, one female |
| Length | 1.5+1.2m |
| Note: one piece for one discussion unit | |





◆ Interpreter Cable **25P-3/5/10**

| | |
|--|--------------------------|
| Type | 25P one male, one female |
| Length | 3m/5m/10m |
| Interface | DB25 |
| Note: One 3m and one 10m for one interpreter console | |



System Configuration

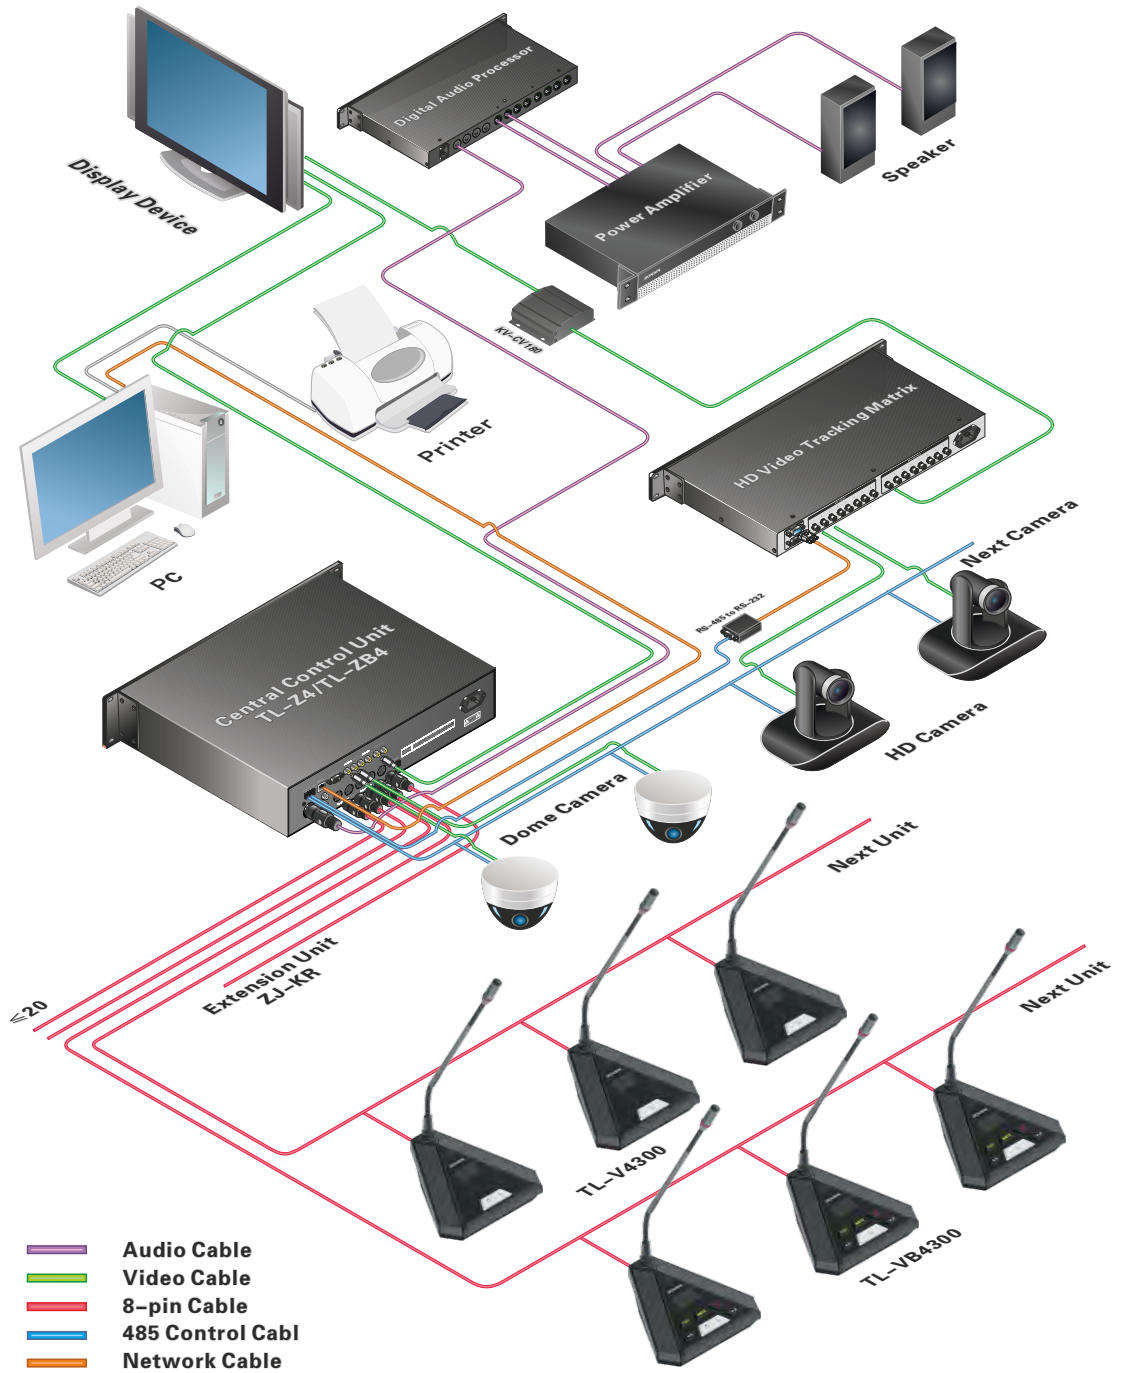

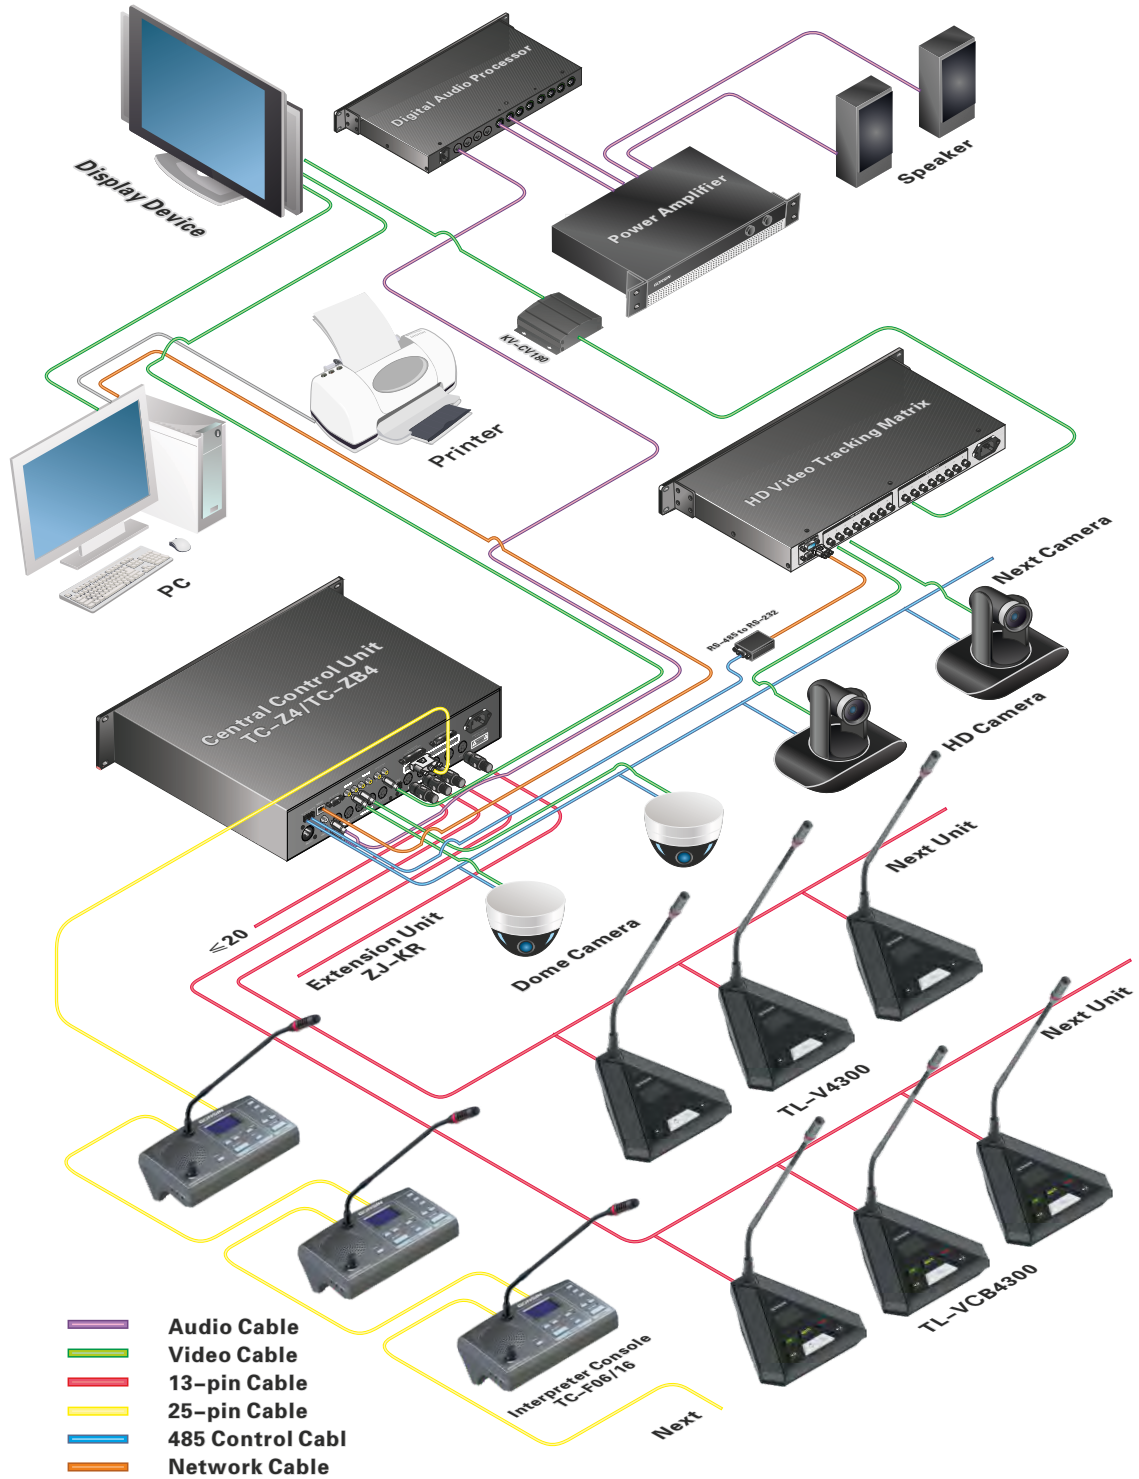

System Components

| Model Number | TL-V4300 | TL-VC4300 | TL-VB4300 | TL-VCB4300 |
|-------------------------|-------------------|-------------------|------------|-------------|
| Central Control Unit | TL-Z4 | TC-Z4 | TL-ZB4 | TC-ZB4 |
| Extension Unit | ZJ- KR | ZJ- KR | ZJ- KR | ZJ- KR |
| Chairman Unit | TL-VX4300 | TL-VXCB4300 | TL-VXB4300 | TL-VXCB4300 |
| Delegate Unit | TL-VD4300 | TL-VDC4300 | TL-VDB4300 | TL-VDCB4300 |
| Interpreter Console | | TC-F06 | | TC-F06 |
| Interpreter Headset | | TC-D4 | | TC-D4 |
| Headphone | | TC-D3 | | TC-D3 |
| Management Software | V7.1.0 (optional) | V7.1.0 (optional) | V7.1.0 | V7.1.0 |
| IC Card Encoder | | | SRD-U100 | SRD-U100 |
| IC Card | | | BL7442 | BL7442 |
| T-type connection cable | 8P-T3 | 13P-T3 | 8P-T3 | 13P-T3 |
| Extension cable | 8PS | 13PS | 8PS | 13PS |

GONSIN CONFERENCE EQUIPMENT CO.,LTD.
www.gonsin.com



All rights reserved. The information and specifications included are subject to change without prior notice.